




TopLine PRO with double-angle

professional tile cutting machine

adjustment of the angle in the direct working area

- for tiles, slabs and mosaics made of earthenware, stoneware, porcelain stoneware and glass
- optimal view of the cutting wheel for the right-hander
- with 2 solid guide bars for exact cuts
- precise and durable ball bearing cutting head (maintenance free)
- with 2 adjustable cutting guides for 90° and 45° with 430 mm and 340 mm scale
- optional guide bar
- lockable breaking device
- breaking device with high compressive force up to 1000 kg and PVC safety pads
- spring supported overlay with anti-skid cellular rubber covering
- PVC feet with anti-slip protection, protect against scratches on finished tile
- professional tungsten carbide wheel Ø 22 mm with TiN-coating
- side supporting surfaces
- carrying handle for a comfortable transport
- wheels for transport
- lockable cutting head for safe transport

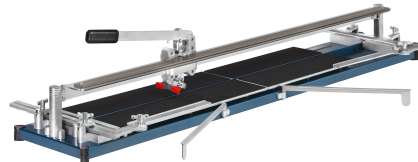

Picture: TopLine PRO with double-angle with mounted guide rail
 (available as accessory)



Picture: Guide rail for Topline PRO with double-angle



Order number	Type	Cutting length	Diagonal cut	Breaking power	Cutting wheel	Weight
10.445.01	Guide bar	1250 mm	---	---	---	0,65 kg
10.445.02	Guide bar	1550 mm	---	---	---	0,79 kg
10.445.03	Guide bar	1830 mm	---	---	---	0,91 kg
10.845.06	TopLine PRO with double-angle bottom made of steel with 2 guide rails, wheels for transport in wooden carrier box	1550 mm	1000 x 1000 mm	16 mm	Ø 22 mm TiN	28,9 kg
10.845.07	TopLine PRO with double-angle bottom made of steel with 2 guide rails, wheels for transport in wooden carrier box	1830 mm	1250 x 1250 mm	16 mm	Ø 22 mm TiN	34,2 kg
10.845.16	TopLine PRO with double-angle bottom made of steel with 2 guide rails, wheels for transport	1550 mm	1000 x 1000 mm	16 mm	Ø 22 mm TiN	28,9 kg
10.845.17	TopLine PRO with double-angle bottom made of steel with 2 guide rails, wheels for transport in wooden carrier box	1830 mm	1250 x 1250 mm	16 mm	Ø 22 mm TiN	34,2 kg
10.848.05	TopLine PRO with double-angle bottom made of steel with 2 guide rails, wheels for transport	1250 mm	880 x 880 mm	16 mm	Ø 22 mm TiN	24,7 kg
10.848.15	TopLine PRO with double-angle bottom made of steel with 2 guide rails, wheels for transport in wooden carrier box	1250 mm	880 x 880 mm	16 mm	Ø 22 mm TiN	24,7 kg